

**MISSIONS OF OPPORTUNITY
NOTICE (SALMON-3)
ANNOUNCEMENT OF OPPORTUNITY
Commercial FAA-Licensed Launch Services Program Information Summary
12/20/2020**

AO-Provided Commercial FAA-Licensed Launch Services Ground Rules/Policy

This document provides additional information on the Announcement of Opportunity (AO)-Provided Commercial Federal Aviation Administration (FAA)-Licensed Launch Services. This launch service will be provided by NASA and procured and managed by the NASA Launch Services Program (LSP) using government contracts.

The cost for this launch service is to be reflected as a reduction in the Adjusted PEA Cost Cap of ~~\$12M~~ **\$9M [Amended 30-April-2021; See Q&A 14]** per launch.

Under the provisions of the NASA contract, the launch service includes the launch vehicle (LV) and associated standard services, non-standard services (mission unique options), engineering and analysis, and minimum performance standards. LSP also provides technical management of the launch service, attains technical insight into the LV production/test (commensurate with a Class D mission), coordinates and approves mission-specific integration activities, provides mission unique LV hardware/software development, provides payload-processing accommodations, and manages the launch campaign/countdown.

At the appropriate time following mission selection, LSP, using the appropriate contracting mechanism, will competitively select a launch service provider and award a launch service contract for the mission based on customer requirements. The contract will be awarded to the Contractor that provides the best value in launch services to meet the Government's requirements based on technical capability/risk, reasonableness of proposed price, and past performance. Accordingly, assumption of a specific launch vehicle configuration as part of the AO proposal will not guarantee that the proposed LV configuration will be selected unless there is firm technical rationale for sole source. Any such rationale should be clearly identified and explained in the proposal.

All NASA-procured launch services are to be consistent with NASA Policy Directive (NPD) 8610.7D, Launch Services Risk Mitigation Policy for NASA-Owned and/or NASA-Sponsored Payloads/Missions. Commercial launch services acquired by NASA will be managed in accordance with NPD 8610.23C, Launch Vehicle Technical Oversight Policy and NPD 8610.24C, Launch Services Program Pre-Launch Readiness Reviews (or NASA participation in launch service provider's commercial readiness process). These NPD's can be accessed through the URLs:

<https://nodis3.gsfc.nasa.gov/displayDir.cfm?t=NPD&c=8610&s=7D>

<https://nodis3.gsfc.nasa.gov/displayDir.cfm?t=NPD&c=8610&s=23C>

<https://nodis3.gsfc.nasa.gov/displayDir.cfm?t=NPD&c=8610&s=24C>

Launch Vehicle Information/Configuration/Performance

For AO-Provided Commercial FAA-Licensed Launch Services, the proposal must design for

the enveloping launch vehicle characteristics and capabilities provided in Attachment 1. Figure 1 depicts representative nominal performance to various circular orbits. Vehicle injection dispersion capabilities will determine the accuracy of targeting these orbits.

Attachment 1 Figure 2 depicts the constraining payload fairing static envelope that would ensure compatibility across the range of potential launch vehicles currently expected to be available under the baseline launch service.

The LSP has developed a performance website for vehicles currently on contract to NASA. This website contains information relevant to NASA-procured launch services. This planning tool can be found at the web address: <http://elvperf.ksc.nasa.gov/Pages/Default.aspx/>. Access to this site is available to anyone with an Internet connection and is generally available at any time. For questions, utilize the point(s) of contact listed in this document.

Launch Service

NASA will be responsible for the launch services. Services provided under the AO-provided launch service are:

- the launch vehicle, engineering, analysis, and minimum performance standards and services provided by the NASA contract in place at the time of LV selection;
- mission integration;
- launch site payload processing;
- range safety support;
- down range telemetry support (launch vehicle data only);
- nominal allocation for non-standard/mission unique launch vehicle modifications/services – items typically necessary to customize the basic vehicle hardware to meet spacecraft driven requirements (Proposers are required to include under the PI-Managed Mission Cost any cost of launch services beyond the standard launch services offered. See Section 5.3.6.4 of the PEA). See Attachment 2 for items included for this MO AO investigations.

The “baseline” launch service for this AO is based upon a small-class vehicle.

The cost does not include funding for PI/payload caused launch delays.

Evaluation Form

Attachment 3 shows a preliminary checklist to be used as a guide for the evaluators to assess the launch services. This checklist should provide a guide to the types of information that are expected to be contained in the proposals.

NASA LSP Point of Contact for Additional Information

Additional information including performance quotes, mission integration inquiries, and costs for non-standard services may be obtained from the point of contact below. Otherwise questions must be directed as indicated in the AO.

Shaun Daly
Mission Manager
NASA Launch Services Program
Code VA-C

Kennedy Space Center, FL 32899
Phone: 321-867-8400
Email: shaun.daly@nasa.gov

DRAFT

Attachment 1

Launch Service Characteristics/Capabilities

Performance Information:

Performance capabilities to a range of orbit altitudes/inclinations is available from multiple launch sites. Figure 1 depicts expected representative nominal performance to a common range of altitudes/inclinations (circular orbits). For mission specific information, utilize the LSP performance website and/or the point of contact listed in this document. The LSP performance website may provide multiple vehicle solutions for a practical orbit, however not all vehicles are to be considered in this AO due to cost constraints or are currently flight proven. Please communicate with the point of contact listed in this document for additional information.

Performance Ground Rules:

- The LV performance available generally does not include impacts associated with orbital debris compliance; this must be evaluated on a mission-specific basis. Depending on the LV configuration, this could result in a significant performance impact to ensure full compliance with orbital debris policy.
- Guidance reserves have been allocated to account for 3-sigma flight performance.
- Vehicle-specific injection dispersion capabilities will determine the accuracy to which the orbit targets can be achieved.
- Performance is for baseline LV configuration; non-standard, mission-unique hardware will require additional assessment.
- A representative separation system is assumed, the mass of which is book-kept on the launch vehicle side.

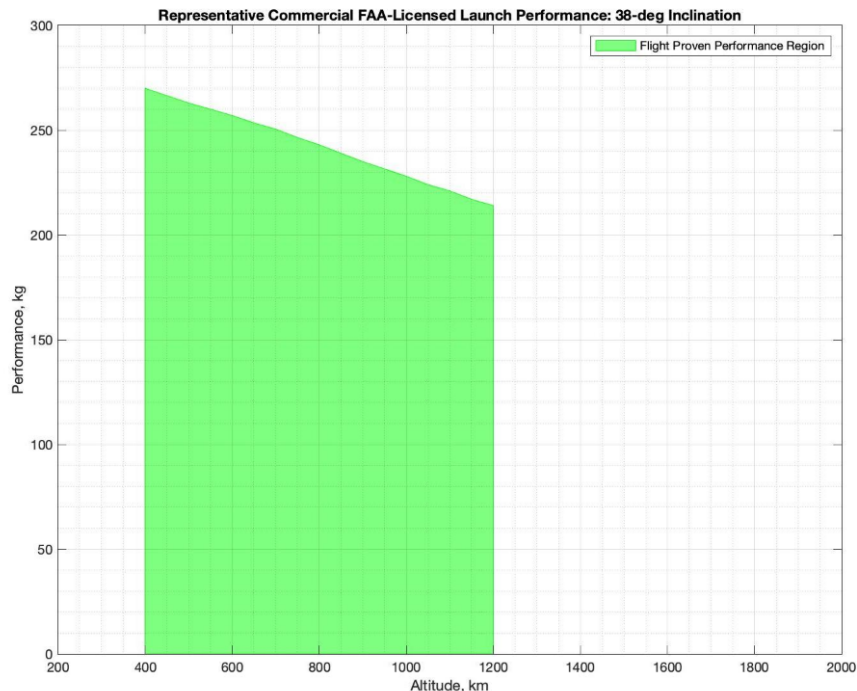


Figure 1a: 38 Degree Inclination Constraining Performance Curves

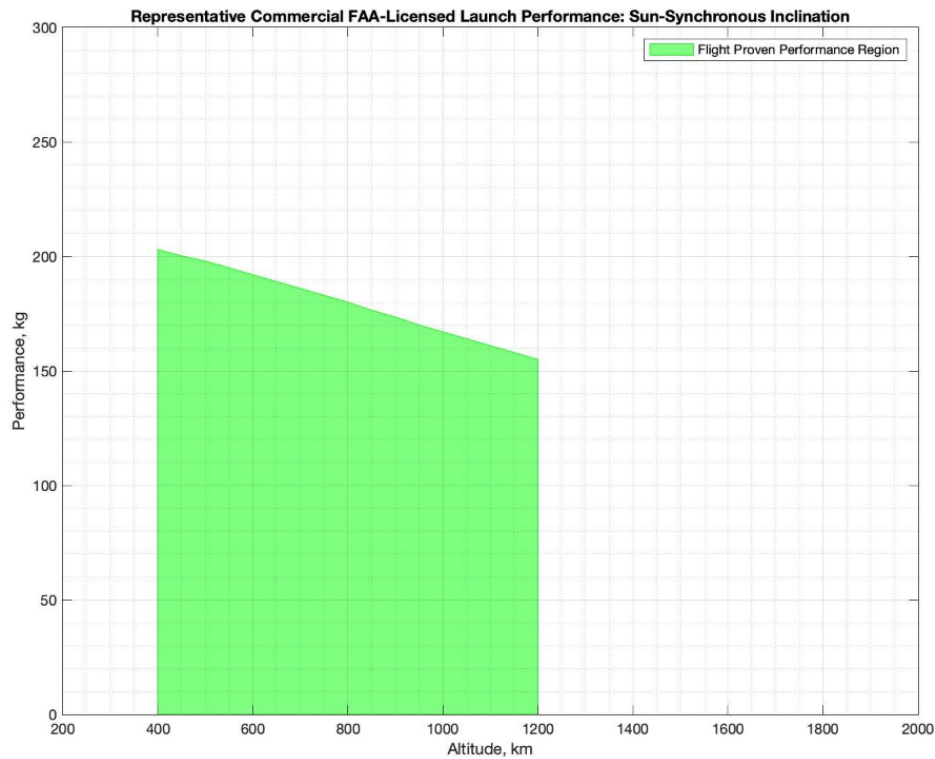


Figure 1b: Sun-Synchronous Inclination Constraining Performance Curves

Payload Envelope:

Figure 2 below shows the constraining static payload fairing envelope that will enable compatibility with all potential small-class launch vehicle configurations projected to meet the performance capability shown in Figure 1.

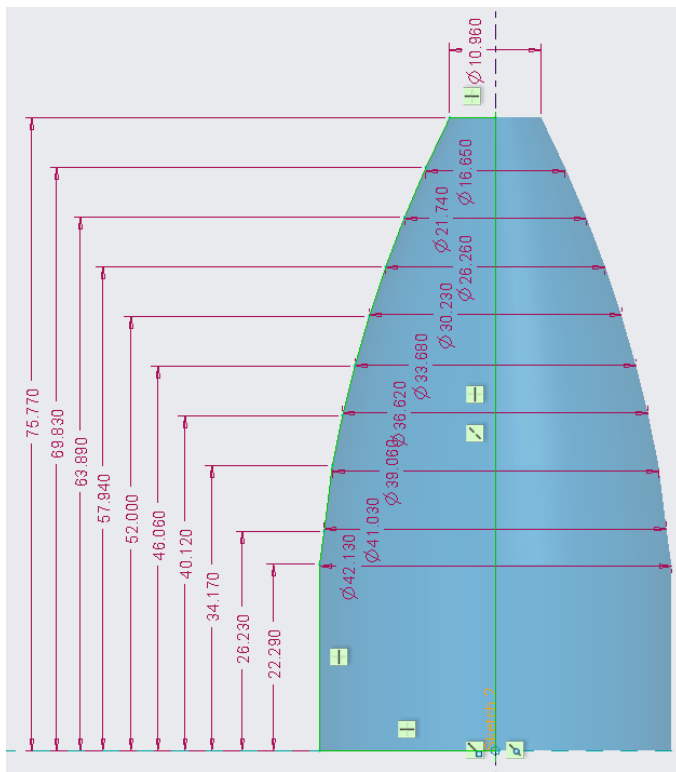


Figure 2
Static Fairing Envelope (in.)

Proposals should include sufficient S/C dimensions to validate fit within this PLF static envelope, including any close approaches.


Figures 3.x Enveloping Environments (Loads, CG, Acoustics, Shock)

3.a CG Load Factors

Suggested CG Load Factors Design Envelope	
Lateral (g's)	Axial (g's)*
2	8
2	-1
-2	-1
-2	8
2	8


*Positive sign in axial load factor denotes compression

Design Load Factors (to be applied to CG of Spacecraft)

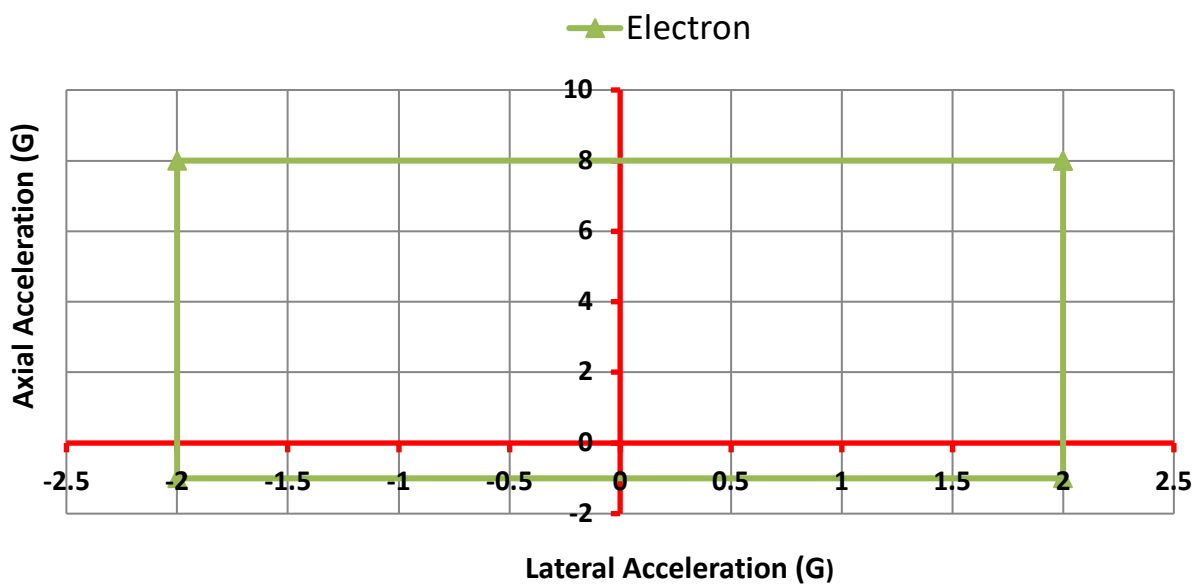

3.b Random MPE Levels at Spacecraft Interface


Suggested Random Vibe Design Envelope	
Frequency (Hz)	PSD (G ² /Hz)
20	0.013
50	0.03
150	0.03
300	0.005
800	0.005
2000	0.01
GRMS	4.14

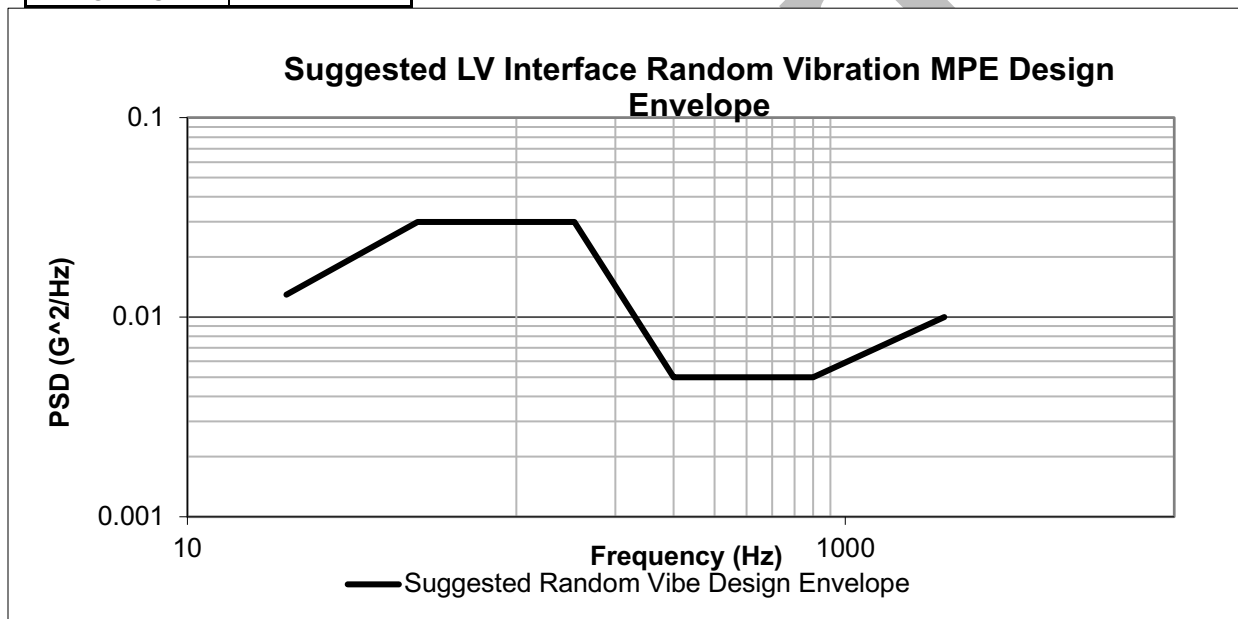

3.c Acoustics


Suggested Acoustics Design Envelope	
Frequency (Hz)	SPL (dB)
25	105.0
31	106.0
40	107.0
50	108.0
63	110.0
80	113.0
100	114.0
125	113.0
160	112.0
200	112.0
250	112.0
315	112.0
400	112.0
500	112.0
630	112.0
800	113.0
1000	113.0
1250	112.0
1600	110.0
2000	108.0
2500	106.0
3150	104.0
4000	102.0
5000	101.0
6300	100.0
8000	100.0
10000	100.0
OASPL (dB)	124.6

Payload Acoustics MPE - 1/3 Octave Band

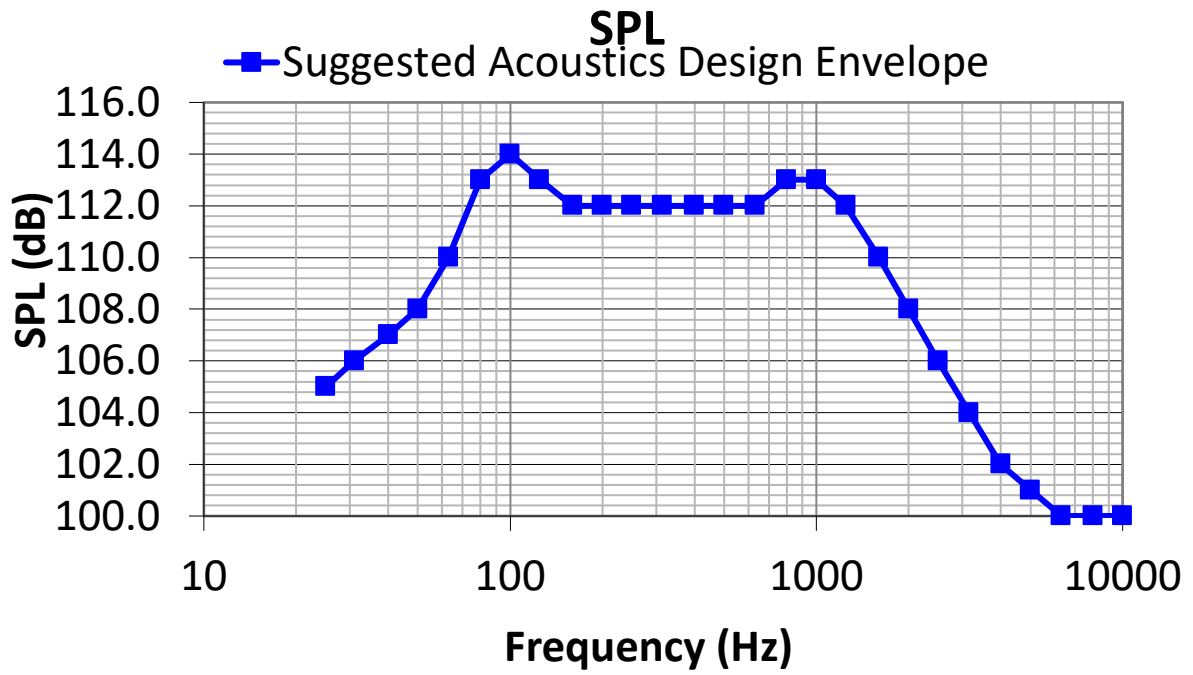

3.d Shock MPE Levels at Spacecraft Interface

Suggested Interface Shock Design Envelope	
Hz	SRS (g-peak)
100	50
900	700
10000	700

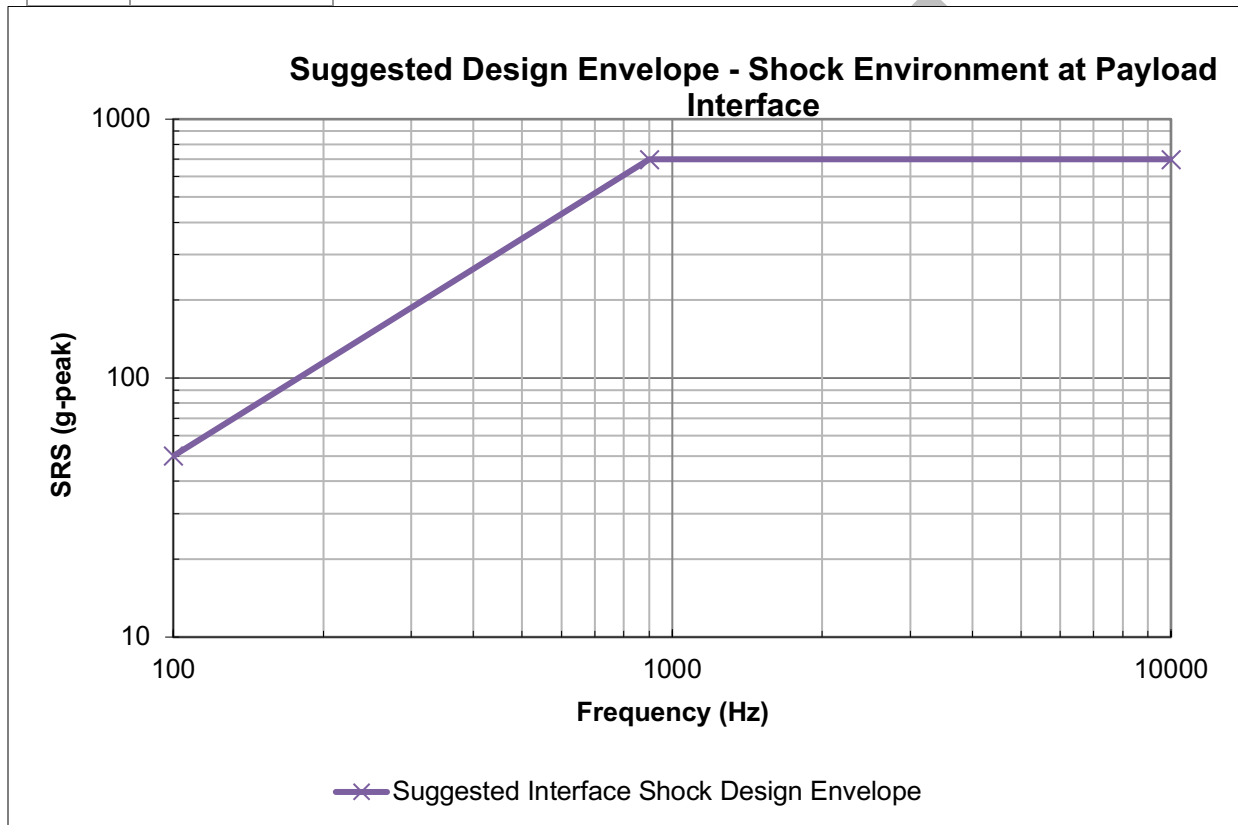

Attachment 2

NASA-LSP Standard Launch Services

This list provides an overview of the standard services that the spacecraft customer will receive with an NASA/LSP-Provided Primary Launch Service.

Integrated Services:

- Range support and services
- Payload processing facility and support
- Contractor Engineering support
- Base Support contractors
- Logistics
- Hazardous support

Launch Vehicle:

- Launch vehicle that meets customer's performance needs
- Payload Fairing with approximately 2 access doors
- Standard LV-provided Payload Separation System
- Standard Payload Adapter
- Standard Test Payload adapter availability
- Single-Spacecraft Collision/Contamination Avoidance Maneuver (CCAM) capability if needed
- Electrical interface connectors (approximately 3 sets)
- Mission Unique Reviews
- Readiness Reviews
- Risk Identification
- Launch Vehicle insight and approval per NPD 8610.23
- Mission integration management & engineering support
- Launch campaign management
- Down range telemetry assets for LV data

Nominal Non-Standard/Mission Unique Services included

- Mission Unique payload isolation system
- T-0 GN2 or pure air Purge
- Class 100K integration environment

The following list provides examples, but not limited to, non-standard/mission unique services that are not included in this AO's NASA-provided launch service, and whose cost would need to be included as part of the Principle Investigator Managed Mission Cost.

- Spacecraft to Launch Vehicle integration @ alternate launch sites
- Custom Payload Adapters
- Auxiliary Propulsion for target orbit achievement
- Spacecraft Spin/De-spin capability for separation (if required)
- Deployable Telemetry Tracking Assets for multiple spacecraft missions
- LV mods/analyses for non-separating interface with multiple SC deployments
- Class 10K integration environment

Attachment 3
Evaluation Form
Launch Services Program

Proposal Name: _____

Proposal #: _____

Evaluator POC: _____

Phone: _____

Email: _____

Launch Service Technical Evaluation:

Overall Assessment: - Given the ground rules in the AO, is the proposed launch vehicle (LV) concept feasible for this application? (☐Yes or ☐No)

Comments: _____

LV Performance: Area of concern (☐Yes or ☐No)

Proposed LV configuration: _____

Proposed Launch Date: _____

Launch Period (MM/DD/YYYY to MM/DD/YYYY): _____ / _____ / _____ to _____ / _____ / _____

Launch Window (On any given day of the launch period Minutes:Seconds): _____: _____

Orbit requirements: Apogee: _____ km Perigee: _____ km Inclination: _____ deg.

High Energy requirements: C₃: _____ km²/sec² DLA: _____ deg RLA: _____ deg

Proposed LV Performance: _____

Mass (including reserves) Dry Mass: _____ kg Wet Mass: _____ kg

Dry Mass Margin: _____ kg _____ %

Wet Mass Margin _____ kg _____ %

Formulas:

Mass Margin kg = LV Performance – S/C Mass (including reserves)

Mass Margin % = [(Mass Margin kg)/ S/C Mass (including reserves) kg] X 100

LV Performance Comments/issues/concerns:

Launch Service Cost Assessment: Area of concern (☐Yes or ☐No)

Is there additional funding for any mission unique modifications/services? (☐Yes or ☐No)

LV Integration: Area of concern (☐Yes or ☐No)

Does the proposer have experience in LV integration? (☐Yes or ☐No)

LV to Spacecraft Interface: Area of concern (☐Yes or ☐No)

Proposed Payload Fairing (PLF) _____

Spacecraft (S/C) Dimensions: Radial: _____m Height _____m

Any intrusions outside of the PLF usable *static* volume? (☐Yes or ☐No)

Mechanical Interface:

Standard Adapter: _____

Custom Adaptor: _____

Electrical Interface:

Standard _____ Pin(s) Connector(s): (☐Yes or ☐No)

Mission Unique requirements:

Instrument T-0 GN₂ Purge: (☐Yes or ☐No)

T-0 S/C Battery Cooling: (☐Yes or ☐No)

Planetary Protection Requirements: (☐Yes or ☐No)

Contamination Control Requirements: PLF: (☐Yes or ☐No)

LV adapter: (☐Yes or ☐No)

Cleanliness Level: _____ other: _____

Unique Facility Requirements: (☐Yes or ☐No)

Pad: _____

S/C Processing Facility: _____

S/C Environmental Test Plans

Environmental Test Plan/Flow described: (☐Yes or ☐No)

Test Levels provided: (☐Yes or ☐No)

Test Schedule provided: (☐Yes or ☐No)

Comments/issues/concerns: _____

Spacecraft Schedule: Area of concern (☐Yes or ☐No)

Adequate timing of:

Launch Service Integration Start Time: ☐Yes or ☐No)

S/C Environmental Test Program: (☐Yes or ☐No)

Delivery of Verified S/C Model: (☐Yes or ☐No)

S/C ship date: (☐Yes or ☐No)

S/C to LV integrated Operations: (☐Yes or ☐No)

Missions with Radiological material Area of concern (☐Yes or ☐No)

List the Radiological Sources: _____

Are unique facilities required to store/process the Radiological Sources? (☐Yes or ☐No)

Any LV modifications required for additional safety or Launch approval? (☐Yes or ☐No)

Non-NASA Launch Services Area of concern (☐Yes or ☐No)

Does proposal address the PI's approach to managing the commercial launch service? (☐Yes or ☐No)

Is the proposal clear on the approach that the PI will utilize to ensure the adequacy of the technical work performed by the launch provider and to determine flight worthiness? (☐Yes or ☐No)

Does the proposal identify elements of the launch service in which the PI has approval per the modified approach for class D in NPD 8610.23? (☐Yes or ☐No)

Does the proposal identify elements of the launch service in which the PI will have insight per the modified approach for class D NPD 8610.23? (☐Yes or ☐No)

Does the proposal clearly identify the approach that the PI will utilize to perform a Category 1 Certification of the Common Launch Vehicle Configuration (CLVC) per NPD 8610.7, or is the PI providing a CLVC already Category 1 or higher certified? (☐Yes or ☐No)

Does the proposal address PI's responsibility to obtain NASA Flight Planning Board approval prior to acquisition of the launch service? (☐Yes or ☐No)

Does the cost estimate account for the full launch service including mission unique costs, payload processing facility costs, delay penalties, spacecraft fueling costs, and identified risks? (☐Yes or ☐No)

Indicate the type of launch vehicle payment schedule. Are all funds due up front or are payments made over the integration period? (☐Yes or ☐No)

END OF DOCUMENT